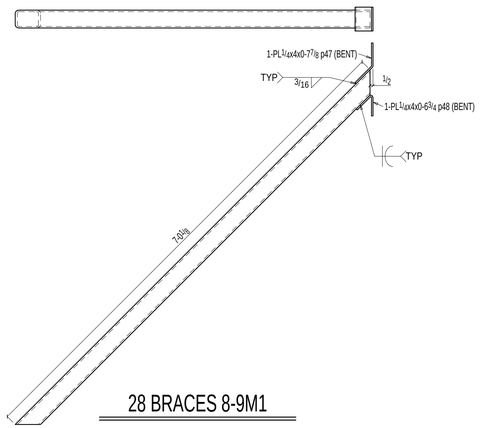


28 BRACES 8-9M1

BILL OF MATERIAL

QTY TOTAL	PC MARK	DESCRIPTION	LENGTH	REMARKS	WEIGHT TOTAL
28	8-9M1	BRACE			1846
28	hss98	HSS3x3x1/4	7 0 1/8	A500C	1730
28	p47	PL1/4x4	0 7 7/8	BENT A572-50	63
28	p48	PL1/4x4	0 6 3/4	BENT A572-50	54

AC METALS LLC
5141 FROLICH LN,
HYATTSVILLE, MD 20781
P: (240) 706-6757

GENERAL LEGEND:

= APPROVER TO VERIFY

= VERIFY IN FIELD

STANDARD SHOP NOTES:

EACH END OF MATERIAL MAY DEVIATE FROM DIMENSIONS SHOWN BY 1/2 NORMAL A6 MILL TOLERANCE FOR LENGTH AND SQUARENESS UNO

WELDERS ARE TO USE FCAW AND/OR SMAW PROCESS PER AWS D1.1 UNLESS NOTED.

ALL MEMBERS TO BE FABRICATED WITH SHIPPING MARKS ON LEFT HAND END.

STANDARD FIELD NOTES:

STEEL IS FABRICATED WITH "ERECTION MARKS" ON LEFT HAND END OF MEMBERS. STEEL MUST BE ERECTED WITH "ERECTION MARKS" WORKWISE AND IN POSITION SHOWN ON ERECTION PLAN.

TOMMY'S AMERICAN
14100 WHITNEY ROAD
GAINESVILLE, VA 20155

GENERAL CONTRACTOR: WINMAR
ARCHITECT: //3877 DESIGN
ENGINEER OF RECORD: LINTON ENGINEERING, LLC

MATERIAL SPECS:

W & WT SHAPES: A992 GRADE 50
TUBES: A500 GRADE B
PIPES: A53
PLATES: A36
CHANNELS: A36
WELDING RODS: E70XX
STEEL SHEETS: ASTM A653

FINISH NOTES:

REV	DATE	DESCRIPTION
1	Aug 12 2026	FOR FAB / FIELD USE

SPEC SECTION:

DRAWN BY: GCN

DATE: 6-3-2026

ITEM: STRUCTURAL STEEL

JOB NUMBER: 26-020

DWG NUMBER: 8-F9

COMMONWEALTH OF VIRGINIA
ERHAN TOLU
LICENSE No. 15096
PROFESSIONAL ENGINEER